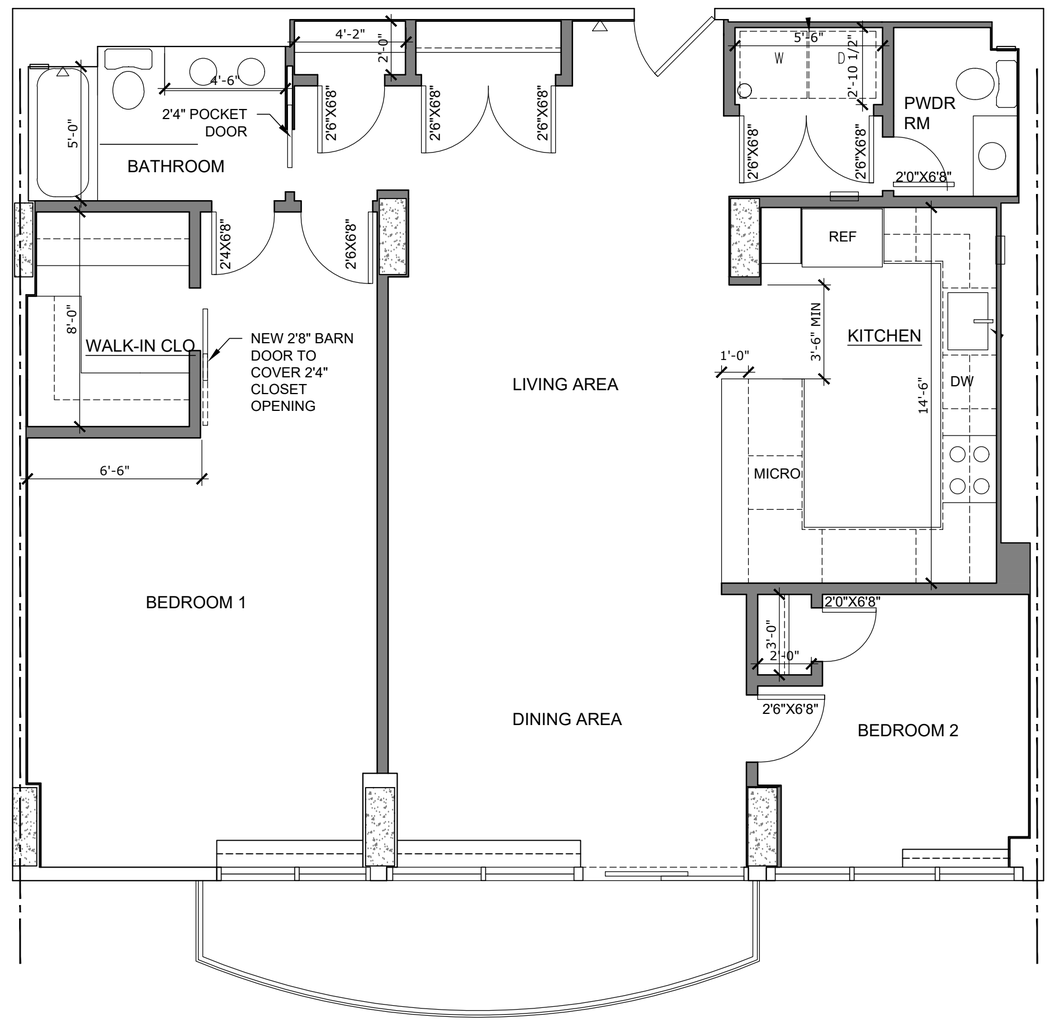



1 CONSTRUCTION PLAN
$\frac{1}{4}$" = 1'-0"

LEGEND

- EXISTING WALL TO REMAIN
- NEW WALL - 3 5/8" METAL STUDS, 16 GA, 5/8" SHEETROCK BOTH SIDES
- NEW DOOR - SOLID CORE WOOD FINISH TBD

NOTE: FIRE DAMPERS AT EXISTING FIRE RATED PARTITIONS ARE EXPECTED TO BE IN PLACE AS PART OF BASE BUILDING DUCTWORK - FIELD VERIFY. PROVIDE ADDITIONAL FIRE DAMPERS IN THIS UNIT AS SHOWN IN THESE DOCUMENTS.

NOTE: NO MODIFICATIONS TO THE BASE BUILDING STRUCTURAL SLAB ARE ANTICIPATED FOR LIGHTING/CEILING WORK, HOWEVER, IF IT IS FOUND NECESSARY DURING CONSTRUCTION, SUCH WORK SHALL NOT COMMENCE WITHOUT WRITTEN APPROVAL BY BUILDING MANAGEMENT

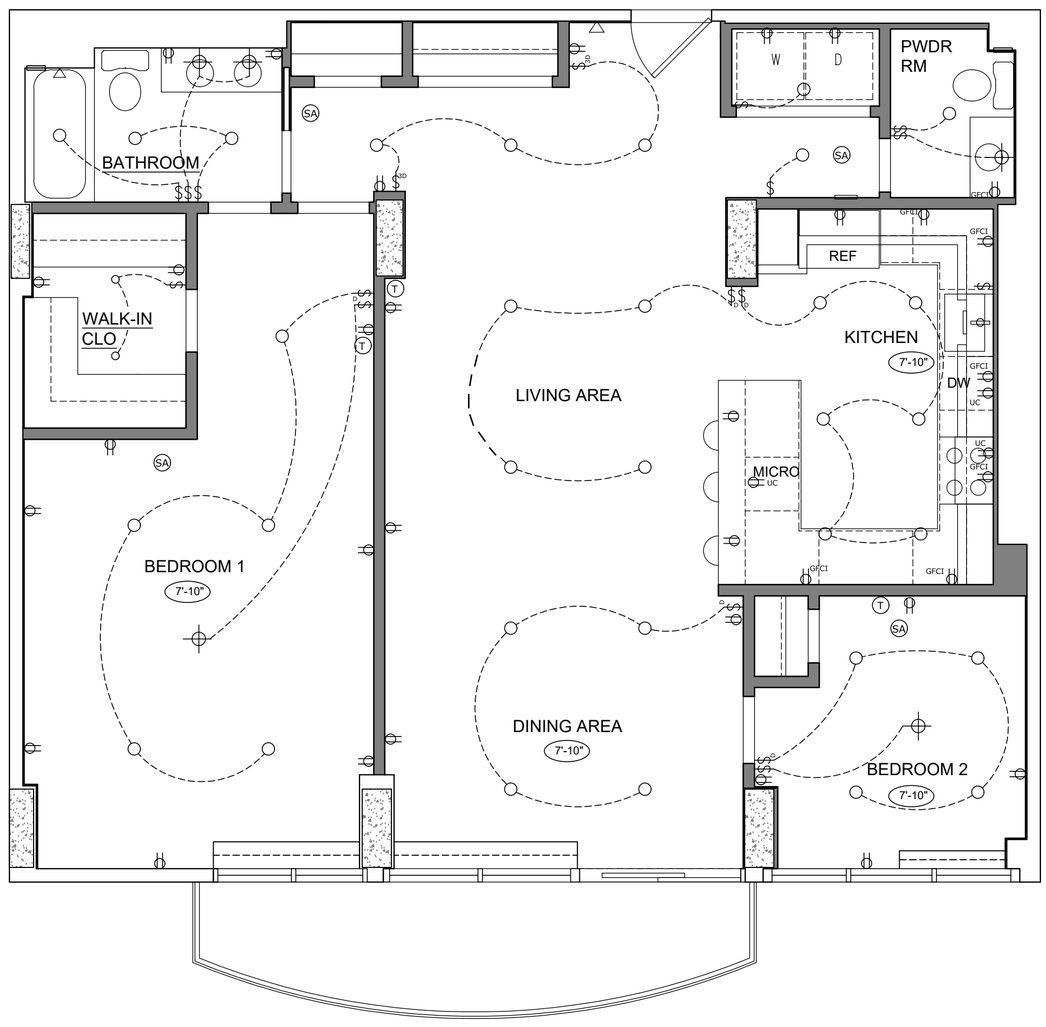

2 REFLECTED CEILING & POWER/ELECTRICAL PLAN
$\frac{1}{4}$" = 1'-0"

GENERAL NOTES

-NEW $\frac{1}{2}$" GWB AT ALL NEW CEILINGS
-GFCI COUNTER OUTLETS TO BE INSTALLED AT 44" AFF
-STANDARD WALL OUTLETS TO BE INSTALLED AT 14" AFF UON.
- ALL SWITCHES IN THE SAME LOCATION SHALL BE GANGED IN THE SAME COVER PLATE. ALIGN VERTICALLY AS NEEDED.
- REFER TO A00 FOR SCOPE OF WORK RELATED TO SMOKE & CO DETECTORS

LEGEND

- 8'-0" — CEILING HEIGHT
- GFCI — GROUND FAULT INTERRUPT OUTLET
- NEW DUPLEX OUTLET
- 4" DIA RECESSED DOWNLIGHT
- DECORATIVE FIXTURE CHOSEN BY OWNER
- $ — LIGHT SWITCH - LEVITRON DECORA
- $DD — LIGHT SWITCH W/ DIMMER
- $3 — 3-WAY LIGHT SWITCH
- USB — USB/DUPLEX OUTLET JACK
- SA — SMOKE ALARM
- T — THERMOSTAT

RECESSED DOWNLIGHT TO BE LIGHTOLIER 4" FLAT DOWNLIGHT SELECT OR EQUAL

PROPOSED ALTERATION AT THE

1 CLARIDGE DRIVE
UNIT 606

VERONA, NJ 07044

JOB # 26-08


CONSTRUCTION & REFLECTED CLG/POWER PLANS

A10


SHEET 2 OF 2

ISSUE	DATE
ISSUE FOR CLIENT REVIEW	2025-04-13
ISSUE FOR PERMIT	2025-04-22

MINDFUL ARCHITECTURE
CHRISTY DIBARTOLO
P.O. BOX 3/
34 OAKRIDGE RD.
VERONA, NJ 07044
(845) 774-6075
mindfularchitecture@gmail.com
www.mindfularch.com

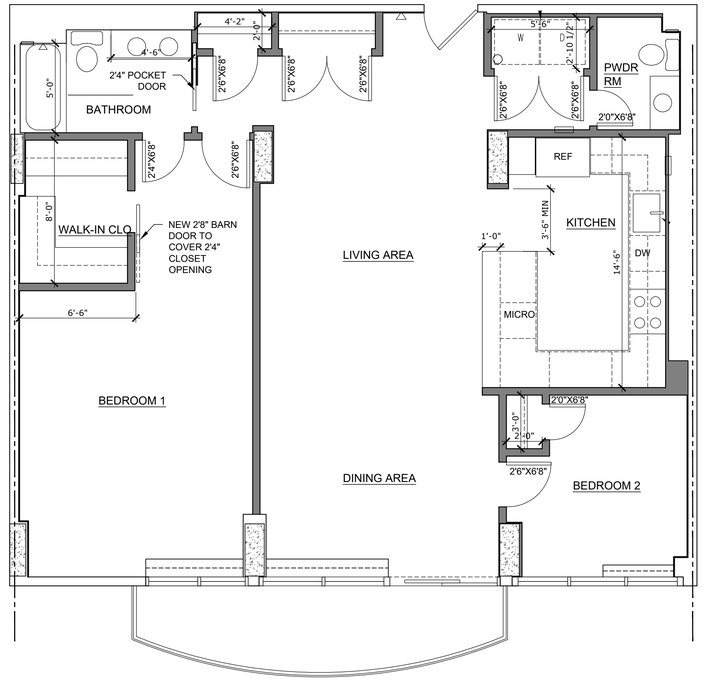

1 CONSTRUCTION PLAN
1" = 1'-0"

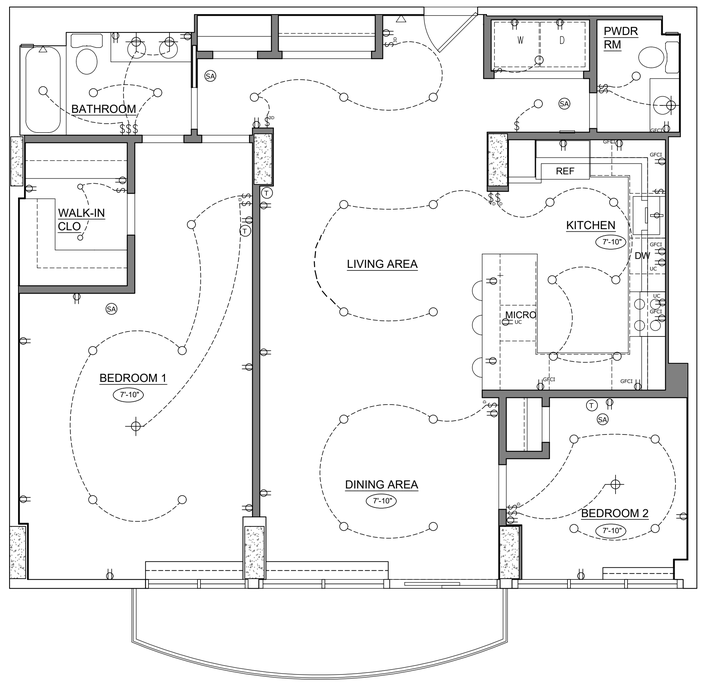

2 REFLECTED CEILING & POWER/ELECTRICAL PLAN
1" = 1'-0"

LEGEND

- EXISTING WALL TO REMAIN
- NEW WALL - 3 5/8" METAL STUDS, 16 GA, 5/8" SHEETROCK BOTH SIDES
- NEW DOOR - SOLID CORE WOOD FINISH TBD

NOTE: FIRE DAMPERS AT EXISTING FIRE RATED PARTITIONS ARE EXPECTED TO BE IN PLACE AS PART OF BASE BUILDING DUCTWORK - FIELD VERIFY. PROVIDE ADDITIONAL FIRE DAMPERS IN THIS UNIT AS SHOWN IN THESE DOCUMENTS.

NOTE: NO MODIFICATIONS TO THE BASE BUILDING STRUCTURAL SLAB ARE ANTICIPATED FOR LIGHTING/CEILING WORK, HOWEVER, IF IT IS FOUND NECESSARY DURING CONSTRUCTION, SUCH WORK SHALL NOT COMMENCE WITHOUT WRITTEN APPROVAL BY BUILDING MANAGEMENT

GENERAL NOTES

-NEW ½" GWB AT ALL NEW CEILINGS
- GFCI COUNTER OUTLETS TO BE INSTALLED AT 44" AFF
-STANDARD WALL OUTLETS TO BE INSTALLED AT 14" AFF UON.
- ALL SWITCHES IN THE SAME LOCATION SHALL BE GANGED IN THE SAME COVER PLATE. ALIGN VERTICALLY AS NEEDED.
- REFER TO A00 FOR SCOPE OF WORK RELATED TO SMOKE & CO DETECTORS

LEGEND

- 8'-0" — CEILING HEIGHT
- GFCI — GROUND FAULT INTERRUPT OUTLET
- NEW DUPLEX OUTLET
- 4" DIA RECESSED DOWNLIGHT
- DECORATIVE FIXTURE CHOSEN BY OWNER
- LIGHT SWITCH - LEVITRON DECORA
- LIGHT SWITCH W/ DIMMER
- 3-WAY LIGHT SWITCH
- USB — USB/DUPLEX OUTLET JACK
- SA — SMOKE ALARM
- T — THERMOSTAT

RECESSED DOWNLIGHT TO BE LIGHTOLIER 4" FLAT DOWNLIGHT SELECT OR EQUAL

MINDFUL ARCHITECTURE
CHRISTY DIBARTOLO
P.O. BOX 3/
34 OAKRIDGE RD.
VERONA, NJ 07044
(845) 774-6075
mindfularchitecture@gmail.com
www.mindfularch.com

ISSUE FOR PERMIT		2025-04-22
ISSUE FOR CLIENT REVIEW		2025-04-13

PROPOSED ALTERATION AT THE

1 CLARIDGE DRIVE UNIT 606

VERONA, NJ 07044

JOB # 26-08

CONSTRUCTION & REFLECTED CLG/POWER PLANS

A10